



# MB120 and MB90

Moisture Analyzers



## *Professional Moisture Analyzers for Advanced Moisture Analysis*

Measuring moisture content has never been easier than with the MB120 and MB90 Moisture Analyzers. Geared to increase precision and efficiency in the lab, these Moisture Analyzers feature a precisely-controlled halogen heating system which helps to yield fast and repeatable results with readability up to 0.01%. The robust housing and die-cast structure is designed for easy, tool-free cleaning and durability. An intuitive touchscreen icon-driven menu guides users through every step of the operation process.

### *Standard Features Include:*

- **Define your Drying Parameters and Store Up to 100 Methods for Easy Recall**  
MB120's Temperature Guide helps to analyze a sample and determine the optimal drying temperature. You can store up to 100 methods and 1000 total results, for statistical analysis of measurements. Three levels of user management are available to meet individual user requirements and ensure data safety.
- **Increase Efficiency in your Lab with Fast Heating Halogen Technology**  
A precisely controlled halogen heating system distributes heat uniformly over the sample, ensuring fast and repeatable results. Four selectable drying profiles for easy one-step drying and seven shut-off criteria to automatically end the test (once moisture loss is no longer detected) are available in the MB120.
- **Effortless Cleaning with the Tool-Free Cleaning Structure**  
Designed with convenient maintenance in mind, no tools are required for cleaning these moisture analyzers. Simply remove the glass and tray to clean the sample chamber. The robust housing and die-cast base guarantee durability.
- **Operate Intuitively Using Icon-Based Navigation on the Colour Touchscreen Display**  
You can access all of the MB120 and MB90's features and parameters on the easy-to-read colour touchscreen display. The intuitive icon-based navigation guides users through every step of the operation process.

# MB120 and MB90 Moisture Analyzers

## Advanced Functionality

Test a wide variety of materials for a range of applications with MB120

- **Temperature Guide**

Easily analyze a sample of a specific material and determine the optimum drying temperature.

- **100 Methods Library Makes Testing Faster**


Program the parameters for up to 100 different types of samples, then select and run your test with the push of a button.

- **Store Up to 100 Results for Each Method for Statistical Analysis**

Quickly retrieve data and save to flash drive.

- **Three-Level User Management**


Set up and lock temperature settings and methods parameters with admin access, so users can't modify settings.

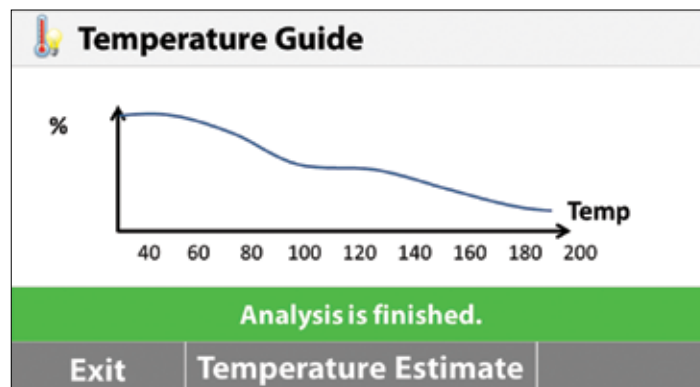

Temperature Guide



Method Library



Results Storage



## Testing Made Simple

The MB Series features a wide, bright touchscreen display and intuitive menu navigation for fast, accurate moisture analysis.

- **Touchscreen Display**

Easy to read and understand

- **Icon-Driven Menu Navigation**

Easy to follow, with no training required

- **4 Mechanical Keys for Fast One-Step Operation**

Tare, Start/Stop, Print, On/Off

- **USB and RS232 Ports**

Quick connections to a PC or flash drive

- **Moisture Analysis Made Simple**

Just 3 easy steps for routine sample testing!


1. Tare empty sample pan
2. Add sample according to best practices
3. Press start and see your results!

# Moisture Analysis Made Simple—and Powerful!

## Exceptional Precision

The MB120 and MB90 provide precise results for more confident testing.

- **Fast Infrared Halogen Heating Technology**  
Halogen heating dries samples in seconds and performs up to 40% faster than traditional Infrared methods.
- **Uniform Drying for Precise, Repeatable Results**  
The reflective sample chamber ensures uniform heating of each sample to yield reliable results of 0.01% readability.
- **Flexible and Powerful**  
Features a full operating temperature range of 40–200 °C (MB90) or 40–230 °C (MB120) in 1 degree increments.
- **Four Drying Profiles to Ensure Accuracy**  
Customize heating of specific samples with temperature control for one-step drying—set temperature and time and begin!  
**Fast:** Quickest possible time to temperature  
**Standard:** Minimal overshoot while achieving temperatures quickly  
**Ramp:** Controlled ramping to temperatures  
**Step:** Set three temperatures at three time intervals
- **Shut-Off Criteria for Automatic Test Completion**  
Customize your own test endpoint criteria to automatically end the test once moisture loss is no longer detected. Choose from up to 7 criteria—Manual, Timed, Auto, AutoFree percent weight loss per second, AutoFree mg loss per second, A30, A60 and A90.

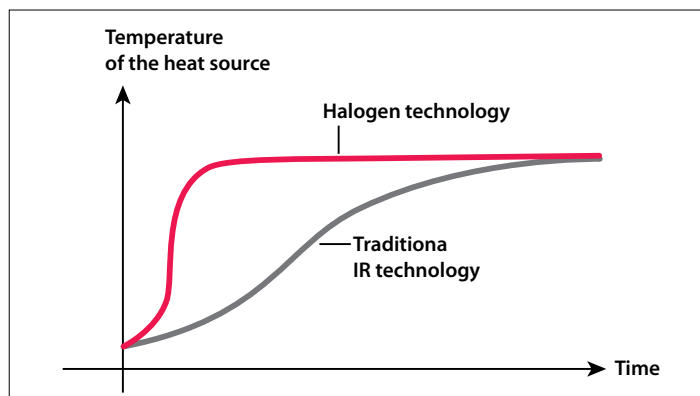


Fast Heating Time



Uniform Drying



Four Drying Profiles



Customized Endpoints



## Easy Tool-Free Cleaning

The MB90 and MB120 feature a patented pan handler and removable parts for convenient maintenance.

- **Stainless Steel Drying Pan**  
Wipe down quickly
- **Removable Heating Chamber Components**  
No tools required—simply remove glass and tray to clean

# MB120 and MB90 Moisture Analyzers

| Model                       | MB120  | MB90  |
|-----------------------------|--|---|
| Capacity                    | 120 g  | 90 g  |
| Readability                 | 0.01 %/0.001 g   | 0.01 %/0.001 g  |
| Repeatability (Std Dev) (g) | 0.05 % (3 g sample)<br>0.015 % (10 g sample)   | 0.18 % (3 g sample)<br>0.02 % (10 g sample)           |
| Moisture Range              | 0.01 % to 100 %<br>(0.01 % to 1000 % for regain mode)  | 0.01 % to 100 %<br>(0.01 % to 1000 % for regain mode) |
| Output                      | RS232, USB host, USB device  |   |
| Heating Element             | Halogen  |   |
| Temperature Range           | 40–230 °C  | 40–200 °C   |
| Power                       | 120 or 240 VAC 50/60 Hz  |   |
| Operating Temperature Range | 10–40 °C   |   |
| Display Type                | 109 mm, QVGA, TFT touch screen   |   |
| Display Results             | %moisture, %solids, %regain, time, temperature, weight, method name, drying curve and statistics |   |
| Pan Size                    | 90 mm  |   |
| Dimensions (W × H × D)      | 210 × 180 × 350 mm   |   |
| Net Weight                  | 5.23 kg  |   |
| Shipping Weight             | 8.35 kg  |   |

## Compliance

- Models are CE, UL listed, CSA approved and FCC approved

## Additional Features—MB120

ABS top housing, stainless steel pan support, stainless steel metal pan handler, in-use cover, 7 shut-off criteria (manual, timed, autofree %/s, autofree mg/s, A30, A60 and A90), 4 heating profiles (standard, fast, ramp and step), storage up to 100 methods and 1000 test results for each method, user guide, 40–230 °C heating temperature range (1 °C increments), 13 operational languages (display only, no key in)

## Additional Features—MB90

ABS top housing, stainless steel pan support, stainless steel pan handler, in-use cover, 3 shut-off criteria (manual, timed or auto), 2 heating profiles (standard and fast), storage up to 2 methods and 100 test results for each method, user guide, 40–200 °C heating temperature range (1 °C increments), 13 operational languages (display only, no key in)

## Accessories

|  |          |
|--|----------|
| Pan Holder, MB90 MB120.....                  | 30246947 |
| In-Use-Cover, Accessory, MB90 MB120 .....    | 30284478 |
| Scoop, Accessory, MB90 MB120 .....           | 30284477 |
| Temperature Calibration Kit .....            | 11113857 |
| Anti-Theft Device, MB AX EX.....             | 80850043 |
| Pan, Aluminum, Set(80), MB Series .....      | 80850086 |
| Filter, Glass Fiber, Set(200).....           | 80850087 |
| Cage, Sample, MB Series.....                 | 80252477 |
| Pan, Reusable, Set(3), 7mm, MB Series.....   | 80252478 |
| Pan, Reusable, Set(3), 14mm, MB Series ..... | 80252479 |
| Printer, Impact, SF40A.....                  | 30064202 |

## Outline Dimensions

