

BST 15L DETECTABLE MOP BUCKET

FEATURING SHATTER RESISTANT XDETECT®

PAGE 1 of 3

Product Specifications

BU5B115LMB | Revised April 2015



The BST 15L Detectable Mop Bucket with Wringer

The BST 15L Detectable Mop Bucket is designed to be a strong, durable bucket with the added safety of being metal detectable and x-ray visible. With the detectable wringer securely clipped into position, the bucket serves as a mop bucket, with the wringer removed the bucket can be used for ingredient handling, decanting and other food contact applications. All components including the strong plastic handle are fully metal detectable and x-ray visible. The polymer used is also impact resistant and even with the worst beating will not break into dangerous fragments.

Product Information

Order Code: BU5B115LMB
Colour: Blue
Material: Polypropylene Co-Polymer (Detectable)
Dimensions: 440 L x 280 W x 300 H mm (Assembled)

Product Advantages

- ✓ 15L Capacity with detectable body, carry handle and wringer
- ✓ Detectable by in-line metal detection systems & x-ray inspection systems
- ✓ Strong, durable, shatter resistant & chemically resistant material
- ✓ Compliant with EU & FDA food contact legislation, including mandatory EU migration test standards
- ✓ Can be used with or without the detachable wringer section
- ✓ Can be used as part of HACCP and BRC procedures
- ✓ Displays due diligence in the prevention of foreign body contamination



BS Teasdale & Son Ltd. Unit 7, Delta Court, Sky Business Park, Robin Hood Airport, Doncaster, South Yorkshire, DN9 3GN
Tel: 0845 643 0950 Email: sales@detectable-products.co.uk Web: www.detectable-products.co.uk

BST 15L DETECTABLE MOP BUCKET

FEATURING SHATTER RESISTANT XDETECT®

PAGE 2 of 3

Food Contact Status (EU)

Hereby we declare that the material XDETECT in various colours is manufactured in line with the relevant requirements of 2023/2006/EC on good manufacturing practice (GMP) for materials and articles intended to come into contact with food.

The raw materials used in the manufacturing process of the above mentioned materials (XDETECT in various colours) can be considered suitable for food contact applications in terms of compliance with European regulations. The raw materials used meet the relevant requirements of EU Framework Regulation 1935/2004 on materials and articles intended to come into contact with food.

All monomers, starting substances and additives used to manufacture these grades are listed in Commission Regulation (EU) No. 10 (2011) on plastic materials and articles intended to come into contact with food. Applicable restrictions on monomers, additives etc. (SML, QM) are available on request. The finished articles are required to meet the Overall Migration Limit (OML) of 10 mg/dm(sq) or 60 mg/kg food.

Colourants used are compliant with European Council Resolution AP(89) 1 on the use of colourants in plastic materials coming into contact with food.

XDETECT (various colours) is compliant with Directive 1895/2005/EC on the restriction of use of certain epoxy derivatives (BADGE, BFDGE, NOGE), since the latter substances are not intentionally used in the manufacturing process of XDETECT 2.0.

The following overall migration results for XDETECT were obtained using a UKAS accredited laboratory, with overall migration simulants and conditions as detailed in EU Regulation No 10/2011.

Method	EN-1186-3 Migration into 10% v/v Ethanol (Simulant A)	EN-1186-3 Migration into 3% w/v Acetic Acid (Simulant B)	EN-1186-3 Migration into Olive Oil (Simulant C)
Replicate #1	0.5 mg/dm ²	0.1 mg/dm ²	2.6 mg/dm ²
Replicate #2	0.7 mg/dm ²	0.0 mg/dm ²	2.9 mg/dm ²
Replicate #3	0.8 mg/dm ²	0.2 mg/dm ²	3.3 mg/dm ²
Replicate #4	-	-	2.7 mg/dm ²
Mean Result	0.7 mg/dm²	0.1 mg/dm²	2.9 mg/dm²
EU Limit	10.0 mg/dm²	10.0 mg/dm²	10.0 mg/dm²

Specific Migration of Barium:

XDETECT samples were exposed in Simulant B (3% Acetic Acid) for 1 Hour at 40°C and the level of Barium in the extracts was determined using inductively coupled plasma mass spectrometry.

The mean result of the test was 146 µg/kg, the limit specified in EU Regulation No 10/2011 for the migration of Barium is 1.00 mg/kg (1000 µg/kg). These results were obtained by an expert independent contractor.

Food Contact Status (FDA)

The polypropylene base resin used in XDETECT meets the FDA (Food and Drug Administration) requirements contained in the Code of Federal Regulations – latest revision (1/4-2011) - in 21 CFR 177.1520 (a) (3) (i) , (b) and (c) (3.1a).

At the same time this base resin grade meets the FDA criteria in 21 CFR 177.1520 for food contact applications, excluding cooking, listed under conditions of use C through H in 21 CFR 176.170 (c), Table 2., and can be used in contact with all food types as listed in 21 CFR 176.170 (c), Table 1. Also the mineral additives and the pigments used are GRAS (Generally Recognized As Safe) or are FDA cleared under specific FDA citations.



BST 15L DETECTABLE MOP BUCKET

FEATURING SHATTER RESISTANT XDETECT®

PAGE 3 of 3

Metal Detectability (FOR GUIDANCE ONLY)

BST XDETECT is an electromagnetically detectable and x-ray visible plastic compound. The metal detectability of this compound will vary based on, but not limited to the following factors:

- Detector Calibration Levels
- Food Product Type / Effect (E.g. Wet, Dry, Frozen, Liquid)
- Detector Aperture Dimensions
- Contaminant Orientation

For this reason BST recommend that all our products be thoroughly tested on your metal detection systems by a trained and certified professional. It may be the case that your equipment needs to be recalibrated in order to reliably detect this product. Such a professional should be available by contacting the manufacturer of your metal detection system. XDETECT samples gave following test piece equivalent readings when tested through the geometric centre of an Anritsu KD8124AW coaxial metal detection system with a 95 x 450 mm aperture:

XDETECT Contaminant Size	Advised Minimum Ferrous Sensitivity for Detection
4.0 mm ³ Cube	2.0 mm FE
6.0 mm ³ Cube	2.5 mm FE
7.0 mm Ø Sphere	2.5 mm FE
8.0 mm ³ Cube	3.5 mm FE
11.0 mm Ø Sphere	4.0 mm FE




Although designed to be detected as a ferrous contaminant, XDETECT will also trigger smaller readings as a non-ferrous and stainless steel contaminant. Please note that the above information is for guidance only, and performance will vary.

X-Ray Visibility (FOR GUIDANCE ONLY)

In contrast to metal detection, x-ray visibility is determined by material density. For this reason, XDETECT contains an additional, evenly dispersed, food safe, high density additive.

Based on our experience and testing, positive readings should be consistent for XDETECT fragments as small as 5mm³. X-ray detection performance will be reduced when small fragments are buried in deeper, denser products. **Detection will depend on product type and density.** This screenshot shows a 5mm³ XDETECT fragment through a popular x-ray inspection system, inside a packaged garlic bread product.

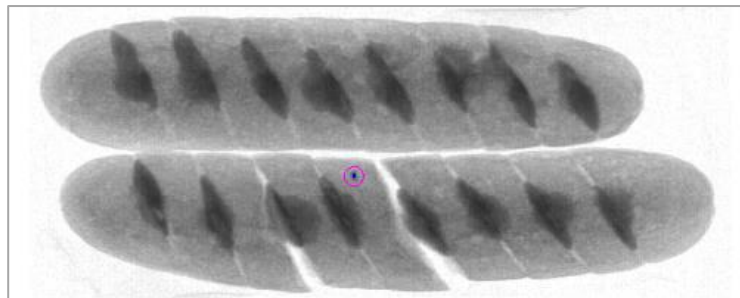

We highly recommend that all our products be thoroughly tested on your x-ray inspection systems by a trained and certified professional. It may be the case that your equipment needs to be recalibrated in order to reliably detect this product. Such a professional should be available by contacting the manufacturer of your x-ray inspection system.

DISCLAIMER

The information provided in this product specification sheet is based on our experience and knowledge to date and we believe it to be true and reliable. This information is intended as a guide for your use of our products, the use of which is entirely at your own discretion and risk. We, BS Teasdale & Son Ltd, cannot guarantee favourable results and assume no liability in connection with the use of our products. © 2017 BS Teasdale & Son Ltd. All Content, Data & Images are owned by BS Teasdale & Son Ltd and are protected by international copyright law.

