
Wireless Alert TP


Wireless Alert TP is a battery-powered temperature sensor that sends a warning email if a user-set level is reached. Simply select your temperature limits and connect to any Wi-Fi network using the FilesThruTheAir mobile app.



- -40 to +125 °C temperature probe with 1.5m cable
- User-configurable high and low temperature limits
- Sends email alerts and scheduled status reports
- Flashing alert indicator
- Wi-Fi connected
- Simple to set up using the free mobile app
- Two years' battery life (typical)
- No ongoing subscription fee:
- Includes sticky pad for wall mounting



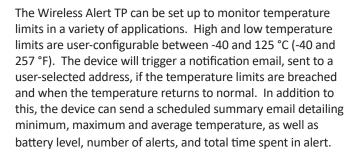

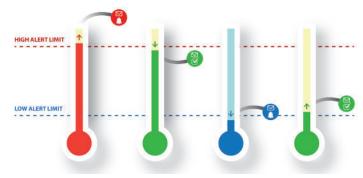

Specifications

	Minimum	Typical	Maximum	Unit
Probe Measurement Range	-40 (-40)		125 (257)	°C (°F)
Device Operating Temperature	-18 (-0)		+55 (131)	°C (°F)
Alert Levels	User-configurable, within probe measurement range stated above			
Measurement Resolution		1 (1)		°C (°F)
Measurement Accuracy		+/-1 (-40 to +80°C) (+/-2 (-40 to +176°F))		°C (°F)
Response Time	< 1 minute			
Environmental Conditions	Device: indoor use only (IP5X), Probe: waterproof (IP67)			
Probe Length		1.5		m
Product Dimensions (excluding probe)	69 x 32 x 22 (2.7 x 1.3 x 0.9) mm (inches			
Battery Type	2 x 1.5V Alkaline LR03/UM4/AAA			
Battery Life		2*		Years
Wi-Fi	WPA/WPA-2 Personal - 802.11bgn (2.4GHz)**			

FilesThruTheAir App

The Wireless Alert TP is simple to set up, using the free FilesThruTheAir app, available on Google Play or the App Store.







Specifications liable to change without prior warning.

Other Wi-Fi connected products from FilesThruTheAir™

FilesThruTheAir offer a variety of sensors and data loggers. Visit **www.filesthrutheair.com** to find out if we have something to fit your application.





^{*} Battery life is dependent on: signal strength between router/access point and Wireless Alert device, presence, volume and type of Wi-Fi traffic from other devices, operating temperature and number of alerts sent.

^{**} For products that are compatible with Enterprise networks, see our EL-WiFi and EL-MOTE data logging ranges.